

ATN NVM14



OPERATOR'S MANUAL (NVM14) REVISION 10 - JUNE, 2015

operator's manual

Important Export Restrictions! Commodities, products, technologies and services contained in this manual are subject to one or more of the export control laws and regulations of the U.S. Government and they fall under the control jurisdiction of either the US Department of State or the US BIS-Department of Commerce. It is unlawful and strictly prohibited to export, or attempt to export or otherwise transfer or sell any hardware or technical data or furnish any service to any foreign person, whether abroad or in the United States, for which a license or written approval of the U.S. Government is required, without first obtaining the required license or written approval from the Department of the U.S. Government having jurisdiction. Diversion contrary to U.S. law is prohibited.



**AMERICAN
TECHNOLOGIES
NETWORK
CORP.**

**Register your product warranty online at
www.atncorp.com/warranty**

The information in this manual furnished for information use only, is subject to change without notice, is not to be construed as a commitment by ATN Corp.

ATN Corp. assumes no responsibility or liability for any errors or inaccuracies that may appear in this book.

© 2015 ATN Corp. All right reserved.

SAFETY SUMMARY

CAUTIONS

- The ATN NVM-14 is a precision optical instrument and must be handled carefully at all times to prevent damage.
- Do not scratch the external lens surfaces or touch them with your fingers.
- Wiping demisting shield with lens paper while wet or with wet lens paper can damage the coating.
- To protect the image intensifier, keep the lens cap on the objective lens when the monocular is not in use or when checked out in daylight conditions.
- The IR illuminator is the light that is invisible to the unaided eye for use during conditions of extreme darkness. However, the light from the illuminator can be detected by others when using night vision devices.
- If you use the rubber eyecaps for a long period of time, you may suffer skin inflammation. If you develop any symptoms, consult a doctor immediately.

CAUTION:

**THIS PRODUCT CONTAINS NATURAL RUBBER LATEX
WHICH MAY CAUSE ALLERGIC REACTIONS**

EQUIPMENT LIMITATIONS

To avoid physical and equipment damage when using the ATN NVM-14, carefully read and understand the following safety precautions.

- The equipment requires some night light (moonlight, starlight, etc.) to operate. The level of performance depends upon the level of light.
- Night light is reduced by passing cloud cover, while operating under trees, in building shadows, etc.
- The equipment is less effective viewing into shadows and other darkened areas.
- The equipment is less effective through rain, fog, sleet, snow or smoke.
- The equipment will not “see” through dense smoke.

NOTES

- At operating temperatures below -20°C (-4°F), alkaline batteries are not recommended, as operating life will be severely reduced. Lithium-iron disulfide 1.5V AA batteries or equivalent should be used below -20°C (-4°F).
- The purpose of the illuminator is to view at close distance up to 3 meters when additional illumination is needed.

TABLE OF CONTENTS

Section	Title	Page
	Safety Summary	a
	Table Of Contents	i
	List of Figures	ii
	List of Tables	iii
	How To Use This Manual	iv
Section I	General Information	1-1
II	Equipment Description	2-1
III	Mounting Procedures	3-1
IV	Operating Procedures	4-1
V	Operational Defects	5-1
VI	Maintenance	6-1
Appendix A	End Item Components	A-1
Appendix B	Repair Parts List	B-1

LIST OF FIGURES

Figure	Title	Page
1.1	ATN NVM-14 — Multi-Use Night Vision monocular	1-2
2.1	ATN NVM-14 Kit Components	2-4
2.2	ATN NVM-14 Optional Components	2-4
3.1	Attaching ATN NVM-14 to Head Mount	3-2
3.2	Attaching ATN NVM-14 to Helmet Mount	3-3
3.3	Attaching ATN NVM-14 to Weapon Mount	3-4
3.4	Mounting of the Dual Bridge Adapter	3-5
3.5	Mounting the IR850	3-6
3.6	Mounting camera to the ATN NVM-14	3-6
3.7	Mounting camcorder to the ATN NVM-14	3-7
3.8	Attaching Adapter to ATN NVM-14	3-7
3.9	Attaching ATN NVM-14 to Mil-Spec Headmount	3-8
3.10	Pair of ATN NVM-14 with Dual Bridge Adapter on the Mil-Spec Headmount	3-8
3.11	Mounting 3x, 5x and 8x Lens to the ATN NVM-14	3-9
4.1	CR123A Battery Installation	4-2
4.2	Mechanical Functions	4-3
4.3	Infrared (IR) Illuminator Operations	4-4
5.1	Shading	5-2
5.2	Edge Glow	5-3
5.3	Bright Spots and Emission Points	5-4
5.4	Fixed-Pattern Noise	5-5
5.5	Chicken Wire	5-6
6.1	Maintenance/Replacement of the tube in the NVM-14	6-9

LIST OF TABLES

Table	Title	Page
2.1	Specification	2-3
2.2	ATN NVM-14 Major Components	2-5
2.3	ATN NVM-14 Accessory packages	2-6
2.4	Goggle Kit	2-6
2.5	Advanced Package 1	2-6
2.6	Advanced Package 2	2-7
2.7	Select Package 1	2-7
2.8	Select Package 2	2-7
4.1	Estimated Battery Life	4-2
6.1	Preventive Maintenance Checks and Service for the ATN NVM-14	6-2
6.2	Operator Troubleshooting for the ATN NVM-14	6-6
A.1	ATN NVM-14 End Item Components	A-1
B.1	ATN NVM-14 Repair Parts List	B-1

HOW TO USE THIS MANUAL

USAGE

You must familiarize yourself with the entire manual before operating the equipment. Read the complete maintenance task before performing maintenance and follow all **WARNINGS**, **CAUTIONS**, and **NOTES**.

MANUAL OVERVIEW

The manual contains sections for Operating and Maintaining the Multi-Use Night Vision Monocular ATN NVM-14.

Components of End Item are in **Appendix A**.

Repair Parts List is in **Appendix B**.

SECTION I

GENERAL INFORMATION



Figure 1.1
ATN NVM-14 — Multi-Use Night Vision Monocular

1.1 GENERAL INFORMATION

A. TYPE OF MANUAL

Operator (Including Repair Parts List).

B. MODEL NUMBER AND BASIC DESCRIPTION

ATN NVM-14 – Multi-Use Night Vision Monocular

C. SUPPLIER

American Technologies Network Corp.

1341 San Mateo Avenue,

South San Francisco, CA 94080 USA

D. PURPOSE OF EQUIPMENT

To provide the user with the ability to observe at night under moonlight and starlight conditions. The ATN NVM-14 can be handheld, head mounted, helmet mounted or weapon mounted to enable walking, surveillance, security, map reading, vehicle maintenance, and administering first aid. The unit allows for horizontal and vertical adjustments when head or helmet mounted and is also equipped with an infrared light-emitting source.

1.2 WARRANTY INFORMATION

This item shall conform to design, manufacturing, and performance requirements and be free from defects in material and workmanship for a period of two (2) years from the date of acceptance. If item is defective, notify ATN or point of purchase contact.

1.3 TECHNICAL INFORMATION

For technical information contact ATN Corp. directly at (650) 989-5100, or info@atncorp.com or your point of purchase contact.

1.4 LIST OF ABBREVIATIONS

BAT	- Battery
Illum	- Illuminator
IR	- Infrared
mm	- Millimeters
NVG's	- Night Vision Goggles

SECTION II

EQUIPMENT DESCRIPTION

2.1 SYSTEM DESCRIPTION

The ATN NVM-14 is a hand-held, head-mounted, helmet-mounted, or weapon-mounted night vision system that enables walking, short-range surveillance, map reading, vehicle maintenance, and administering first aid in both moonlight and starlight. Each unit allows for vertical adjustment (by using head straps), fore-and-aft adjustment, objective lens focus, and eyepiece focus. The device is also equipped with an infrared light-emitting source.

NVM-14 Night Vision Monocular utilizes the principle of intensification of the residual light which is reflected from the surrounding objects. The optical system of the monocular consists of: an objective lens, an image intensifier tube and an eyepiece.

Even under unsteady brightness conditions, Automatic Brightness Control System always keeps the IIT brightness level constant.

NOTE

Automatic Brightness Control System do not protect a device from damage by bright light sources (a fire, headlights of the automobile, lanterns, etc.). Do not point the device at a bright light source.

The Automatic Protective System controls the existing illumination level through the photo receiver. If the illumination level surpasses 100-300 lx for the following 10 seconds, the monocular will shut off automatically.

The scope is equipped with the Automatic Shut-off System. This system tracks when the scope is not used (the controls are not touched for 60 minutes continuous) and shuts the unit off automatically.

Built-in IR Illuminator makes it possible to observe the objects when the monocular works in the conditions of low light or total darkness.

The eyepiece incorporates several LED indicators:

Green LED — stays solid green when the battery is full. Will be flashing when battery are low.

Red LED — will be on when IR is on.

2.2 WEIGHT, DIMENSIONS, AND PERFORMANCE

TABLE 2.1 SPECIFICATION

WEIGHT AND DIMENSION	
Weight (without battery)	280 grams
Length	120 mm
Width	49 mm
Height	69 mm
PERFORMANCE	
Magnification	1X
f-Number	1.2
Field of View	40 degrees
Eyepiece Diopter Adj.	-6 to +2
Eye Relief	25 mm
Focusing range	0.25 m to infinity
Voltage	3.0 VDC
Power Requirements	1 CR123A
IR Illumination Range	3 meters
CONTINUOUS OPERATION	
1 CR123A battery	60 hours (Gen. 2+) 50 hours (Gen. 3 and 4)

2.3 DESCRIPTION OF MAJOR COMPONENTS



Figure 2.1
ATN NVM-14 Kit Components

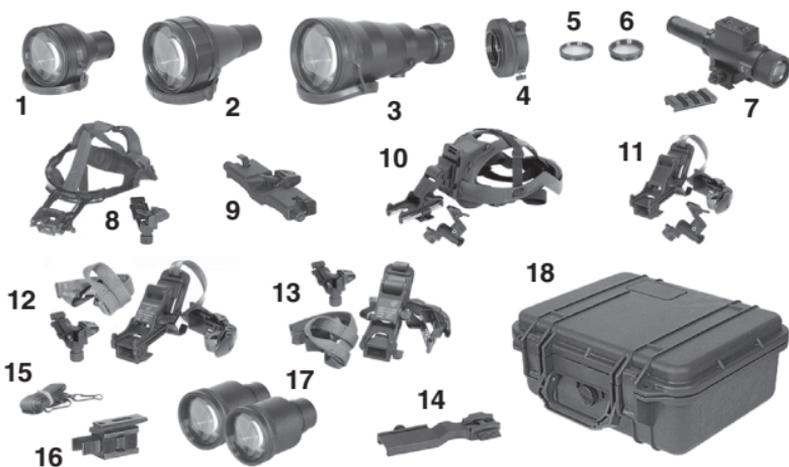


Figure 2.2
ATN NVM-14 Optional Components

TABLE 2.2 ATN NVM-14 MAJOR COMPONENTS

ITEM	DESCRIPTION
Kit Components	
1	Multi-Use Night Vision monocular
2	Lens Cap
3	Eyecup
4	Soft Carrying Case
5	Operator's Manual
6	Battery 123A Lithium
7	Wrist Strap
Optional Components	
1	3X Afocal Lens
2	5X Lens
3	8X Lens
4	Camera/Camcorder Adapter
5	Demist Shield
6	Sacrificial Window
7	IR-850-B1
8	Mil-Spec Head Mount Assembly Kit
9	Dual Bridge Adapter for Mil-Spec Headmount
10	Goggle Kit
11	Universal Helmet Mount
12	MICH Helmet Mount Kit
13	PASGT Helmet Mount Kit
14	Weapon Mount Adapter Piccatiny/Mil 1913
15	Shoulder Strap
16	Dual Bridge
17	3x Binocular Lens (pair)
18	Hard Shipping/Storage Case

TABLE 2.3. ATN NVM-14 ACCESSORY PACKAGES

ITEM #	DESCRIPTION
ACMPAN14GK	Goggle Kit
ACMPAN14A1	Advanced Package 1
ACMPAN14A2	Advanced Package 2
ACMPAN14S1	Select Package 1
ACMPAN14S2	Select Package 2
ACMPAN14LS3A	3x Afocal Lens
ACMPAN14LS05	5x Lens
ACMPAN14LS08	8x Lens
ACMPAN14CA	Camera Adapter
ACMPAN14DB	Dual Bridge
ACMPAN14HMNT	Universal Helmet Mount Kit
ACMPAN14HMNM	MICH Helmet Mount Kit
ACMPAN14HMNP	PAGST Helmet Mount Kit
ACMUIR85B1	IR850-B1

TABLE 2.4. GOGGLE KIT

DESCRIPTION	ITEM (FIG. 2.2)
Flip-up Head Mount	11

TABLE 2.5. ADVANCED PACKAGE 1

DESCRIPTION	ITEM (FIG. 2.2)
Flip-up Head Mount	11
Demist Shield	6
Sacrificial Window	7
Camera Adapter	4
3x Afocal Lens	1
Mil Spec. Hard Case	23

TABLE 2.6. ADVANCED PACKAGE 2

DESCRIPTION	ITEM (FIG. 2.2)
Flip-up Head Mount	11
Demist Shield	6
Sacrificial Window	7
Camera Adapter	4
3x Afocal Lens	1
Mil Spec. Hard Case	23
Weapon Mount Adapter	16

TABLE 2.7. SELECT PACKAGE 1

DESCRIPTION	ITEM (FIG. 2.2)
Flip-up Head Mount	11
Demist Shield	6
Sacrificial Window	7

TABLE 2.8. SELECT PACKAGE 2

DESCRIPTION	ITEM (FIG. 2.2)
Flip-up Head Mount	11
Demist Shield	6
Sacrificial Window	7
Weapon Mount Adapter	16

STANDARD KIT COMPONENTS

- 1) **Multi-Use Night Vision Monocular**
The monocular night vision device with 1x magnification.
- 2) **Lens Cap**
A cap used to protect the lens and for testing the unit in the daylight.
- 3) **Eyecup**
A rubber cup used to protect eyepiece and for operator comfort.
- 4) **Soft Carrying Case**
A protective bag used to store ATN NVM-14 and accessories.
- 5) **Operators Manual**
Provides equipment description, use of operator controls and preventative maintenance checks and service.
- 6) **Battery 123A Lithium**
A single, 123A lithium battery used to power the unit.
- 7) **Wrist Strap**

OPTIONAL COMPONENTS

- 1) **3X Afocal Lens**
Attaches to the ATN NVM-14 for enhanced range performance; reducing the field of view to 13 deg.
- 2) **5X Lens**
Attaches to the ATN NVM-14 for enhanced range performance; reducing the field of view to 8 deg.
- 3) **8X Lens**
Attaches to the ATN NVM-14 for enhanced range performance. Tripod mountable.

- 4) **Camera/Camcorder Adapter**
This adapter attaches to the ATN NVM-14 eyepiece to collect imagery from the ATN NVM-14.
- 5) **Demist Shield**
Used to prevent eyepiece lenses from becoming fogged.
- 6) **Sacrificial Window**
A replaceable window supplied to protect the objective lens during operation in adverse conditions.
- 7) **IR-850 IR Illuminator with Picatinny Adapter**
Powerful 850mW infra-red illuminator is an efficient tool for long range nighttime observation in the total darkness.
- 8) **Mil-Spec Head Mount Assembly Kit**
This kit contain Mil-Spec head mount and adapter which allows to attach the NVM14 to the Mil-Spec head mount.
- 9) **Dual Bridge Adapter for Mil-Spec Headmount Assembly**
The adapter allows attaching ATN NVM-14, while in the binocular configuration, to the Mil-Spec head mount or PAGST or MICH helmet mount.
- 10) **Goggle Kit**
Adjustable universal assembly that secures the ATN NVM-14 to the operator's head providing hands-free operation.
- 11) **Flip-up Universal Helmet Mount**
Provides mount interface for the ATN NVM-14 to a range of ballistic helmets.
- 12) **MICH Helmet Mount Kit**
This kit contain MICH helmet mount and adapter which allows to attach the NVM14 to the MICH helmet mount.

- 13) PASGT Helmet Mount Kit**
This kit contain PASGT helmet mount and adapter which allows to attach the NVM14 to the PASGT helmet mount.
- 14) Weapon Mount Adapter Picatinny/Mil 1913**
Small arms adapter that allows the ATN NVM-14 to be mounted on a weapon using Picatinny or Mil 1913 rail.
- 15) Shoulder Strap**
- 16) Dual Bridge**
A Dual Bridge allows using the NVM14 as a pair of dual tube goggles.
- 17) 3x Binocular Lens (pair)**
Pair of 3x Afocal Binocular Lenses connected to each other through a Dual Bridge provide for a compact dual channel binocular.
- 18) Hard Shipping/Storage Case**
A protective case used for shipping/storing of ATN NVM-14 and accessories.

SECTION III

MOUNTING PROCEDURES

3.1 MOUNTING PROCEDURES

A. MOUNTING THE ATN NVM-14 TO A HEADMOUNT

To mount the ATN NVM-14 to a headmount, perform the following:

1. Loosen the nut (C). Attach the adapter (A) to the rail (B) of ATN NVM-14. Tighten the nut (C) anew.
2. Align the adapter and the head. Slide the monocular rearwards until the alignment boss (D) aligns with the alignment groove (E) on the headmount. Push until the monocular locks into the headmount.
3. Place the headmount with NVM-14 onto a head.
4. Slide button (F) and move the unit along the rail for eye relief adjustment.
5. The NVM-14 headmount has a flip-up mechanism. Push the button (G) on the side of mount and lift the unit up until the unit reaches in the top position.
6. Push the same button (G) to lower NVM-14 to the viewing position. Turn the device on for continuation of the operation.
7. The NVM-14 can be placed before the right or left eye. In order to re-adjust the monocular for use with another eye, take the unit off the adapter, turn the unit to other side (for 180°) and mount it on the headset through the rail on this side. Push the button (H) and move the device along the slide-rail (I) for comfortable position.

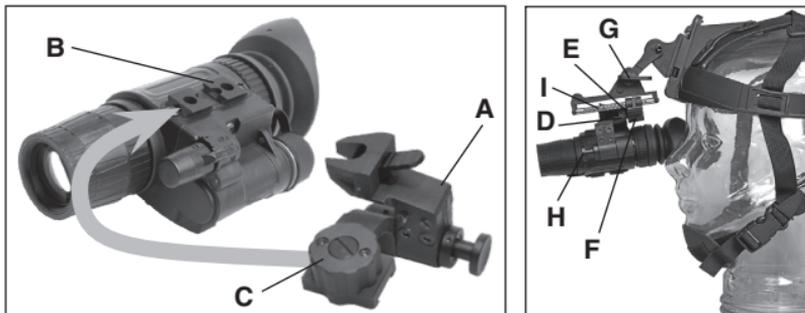


Figure 3.1
Attaching ATN NVM-14 to Head Mount

B. MOUNTING THE ATN NVM-14 TO A HELMET

Attachment of ATN NVM-14 to a range of ballistic helmets. The Helmet mount fits securely onto helmet via a rugged strapping device and grooved hooks. With helmet mount, the NVM-14 can be positioned directly in front of user's eyes or flipped up out of viewing position.

1. Loosen the nut (C). Attach the adapter (A) to the rail (B) of ATN NVM-14. Tighten the nut (C) anew.
2. Tighten and fixate the straps (D).
3. Align the adapter and the head. Slide the monocular rearwards until the alignment boss (H) aligns with the alignment groove (F) on the helmet mount. Push until the monocular locks into the helmet mount.
4. Place the helmet mount with NVM-14 onto a head.
5. Slide button (I) and move the unit along the rail for eye relief adjustment.
6. The NVM-14 helmet mount has a flip-up mechanism. Push the button (E) on the side of mount and lift the unit up until the unit reaches in the top position.

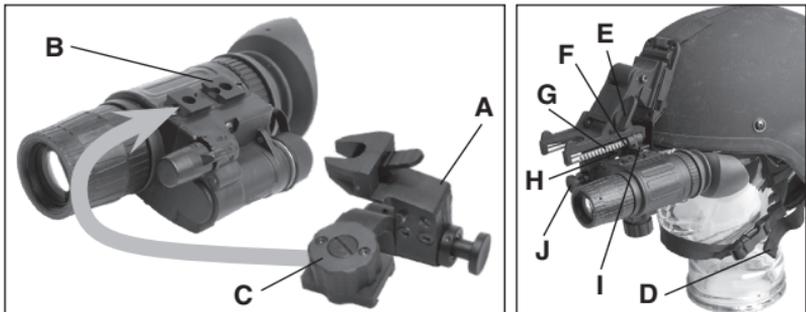


Figure 3.2
Attaching ATN NVM-14 to Helmet Mount

7. Push the same button (E) to lower NVM-14 to the viewing position. Turn the device on for continuation of the operation.

8. The NVM-14 can be placed before the right or left eye. In order to re-adjust the monocular for use with another eye, take the unit off the adapter, turn the unit to other side (for 180°) and mount it on the headset through the rail on this side. Push the button (J) and move the device along the slide-rail (I) for comfortable position.

C. MOUNTING THE ATN NVM-14 TO THE WEAPON

CAUTION

It is recommended that the eyecup be replaced with the eyeguard when used mounted on the weapon.

NOTE

The ATN NVM-14 is not a weapon sight, however, it can be used in conjunction with a collimated dot sight or laser aiming device.

To mount the ATN NVM-14 perform the following:

1. Loosen the clamping knob on the weapon mount. Position the monocular mount onto the weapon's mounting rail, adjust the fore/aft position of the monocular as necessary by loosening the clamping knob and repositioning the weapon mount on the rail. Tighten by turning the clamping knob.
2. Align the monocular and the weapon mount. Slide the monocular rearwards until the alignment boss aligns with the alignment groove on the weapon mount. Push until the monocular locks into the weapon mount (Figure 3.3).



Figure 3.3
Attaching ATN NVM-14 to Weapon Mount

D. DUAL BRIDGE

The Dual Bridge (A) is designed to connect two units into a binocular configuration.

Dual Bridge also allows the binocular configuration to be attached to the headmount or helmet mount.

To mount the units with Dual Bridge perform the following:

1. Align the unit and the Dual Bridge.
2. Push the clamps (B) on the front of Bridge.
3. Slide the unit rearwards until the alignment boss aligns with the alignment groove (C) on the Bridge. Push until the unit locks into the Bridge.
4. Repeat for second unit.

To detach the unit push the clamps on the front of Dual Bridge and slide the unit forwards.

Dual Bridge allows using the NVM14 with 3x Binocular Lens as a pair of dual tube binocular.

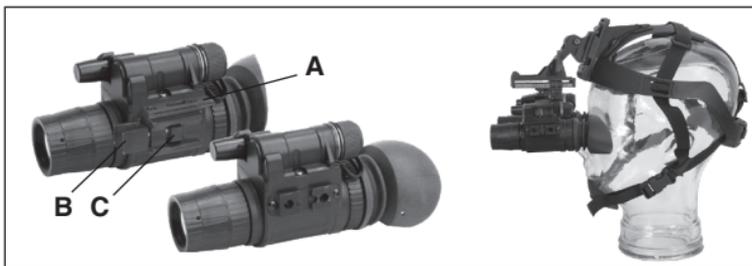


Figure 3.4
Mounting of the Dual Bridge Adapter

E. MOUNTING IR-850 TO THE ATN NVM-14

IR-850 may be mounted on the monocular through the Picatinny adapter.

1. Mount Picatinny adapter(A) onto one of the rails on the monocular. Tighten two fixing screws(B) of the adapter.
2. Loosen the IR-850 fixing screw (C).
3. Mount the IR-850 on the Picatinny Adapter and tighten the fixing screw.

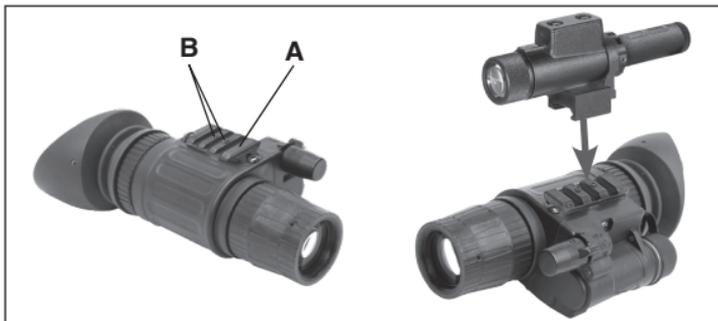


Figure 3.5
Mounting the IR850

F. MOUNTING CAMERA/CAMCORDER TO THE ATN NVM-14

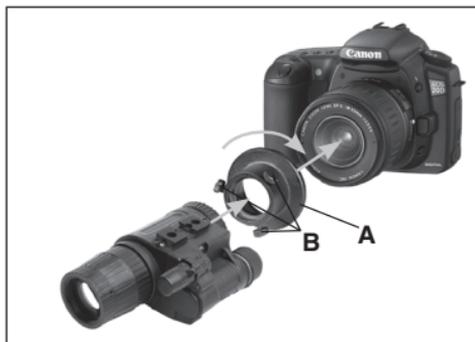


Figure 3.6
Mounting Camera to the ATN NVM-14

1. Screw Camera Adapter into the front lens of a photographic camera with thread M52x0.75 (Figure 3.6) or a video camera with thread M37x0.75 (use adapter ring, Figure 3.7, B) .
2. Remove the rubber eyecup off the monocular.
3. Connect the adapter (Figure 3.6, A) with the eyepiece and gently tighten three fixing screws (Figure 3.6, B) on the adapter.

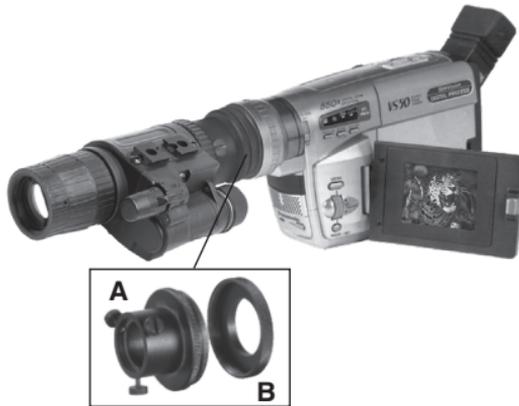


Figure 3.7
Mounting Camcorder to the ATN NVM-14

G. MOUNTING THE ATN NVM-14 TO THE MIL-SPEC HEAD MOUNT AND MICH OR PASGT HELMET MOUNT

To mount the ATN NVM-14 to a head/helmet mount, perform the following:

1. Attach the adapter (Figure 3.8, A) to the rail (B) of ATN NVM-14. Push the clip (C) and slide the rail of monocular



Figure 3.8
Attaching Adapter to ATN NVM-14

into socket (D) of adapter. Push the clip until the adapter will lock the alignment groove in the monocular.

2. Align the adapter and the head/helmet mount. Slide the monocular rearwards until the alignment boss (Figure 3.9, A) aligns with the alignment groove (B) on the head/helmet mount. Push until the monocular locks into the head/helmet mount.

3. With this adapter you may see through the eyepiece using either right or left eye. To change the viewing eye, loosen the nut (Figure 3.8, E) and rotate the socket (D) 180 degrees. Tighten the nut (E) anew.

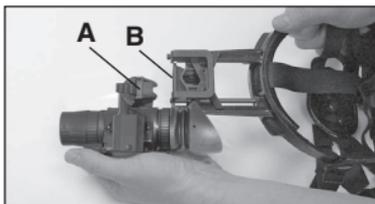


Figure 3.9
Attaching ATN NVM-14 to Mil-Spec Headmount

4. Dual Bridge Adapter for Mil-Spec headmount allows using the NVM14 as a pair of dual tube goggles with Mil-Spec headmount, MICH or PAGST helmet mount.



Figure 3.10
**Pair of ATN NVM-14 with Dual Bridge Adapter
on the Mil-Spec Headmount**

H. MOUNTING 3X, 5X OR 8X LENS TO THE ATN NVM-14

The 3x lens is an afocal lens and screws onto the existing lens.

The 5x and 8x lens requires removing the 1x lens. Unscrew the objective lens and screw 5x or 8x lens to the free place.



Figure 3.11
Mounting 3x, 5x and 8x Lens to the ATN NVM-14

SECTION IV

OPERATING PROCEDURES

4.1 OPERATING INSTRUCTIONS

A. BATTERY INSTALLATION

CAUTION

To protect the image intensifier, keep the lens cap on the objective lens when the monocular is not in use or when checked out in daylight conditions.

TABLE 4.1 ESTIMATED BATTERY LIFE

BATTERY TYPE	USAGE
CR123A	60 Hours (Gen. 2+) 50 Hours (Gen. 3 and 4)

The ATN NVM-14 operates with one CR123A battery. To install the battery, unscrew the battery cap (A). Then you may put the battery observing the polarity indications on the battery compartment surface and screw the battery cap.



Figure 4.1
CR123A Battery Installation

B. MECHANICAL FUNCTIONS

The mechanical functions of the ATN NVM-14 allow for differences in the physical features of individual operators and provide for the system operation. These functions include the **On/Off/On IR control, eye relief** (Section III Mounting Procedures), **diopter adjustment, objective lens focus, and IR illuminator focusing**. These mechanical controls are identified in Figure 4.2.

Operation knob (A) has three positions:

ON: Turns unit on without IR

OFF: Turns unit Off

IR: Turns unit on and IR on

To turn ON, push knob in (towards eyepiece) and rotate to ON (or to IR if want IR illumination).

You may adjust the unit diopter by rotating the eyepiece ring (B). The total dioptic range is covered in 1/2 revolution.

To make the unit focus appropriate for different distances you should rotate the front lens ring (C). The total focusing range is covered in 1/3 ring revolution.

The ring (D) serves to fix the “infinity” position of the front lens focus.



Figure 4.2
Mechanical Functions

C. INFRARED (IR) ILLUMINATOR OPERATIONS

CAUTION

The IR illuminator is a light that is invisible to the unaided eye for use during conditions of extreme darkness. Please note that, the light from the illuminator can be detected by others that are using night vision devices.

NOTE

The purpose of the illuminator is to view at close distance up to 3 meters when additional illumination is needed.

IR Illuminator (A) gets activated when the Operation knob (B) is rotated to the IR position. A red light appears in the eyepiece to indicate that the IR illuminator is operating.

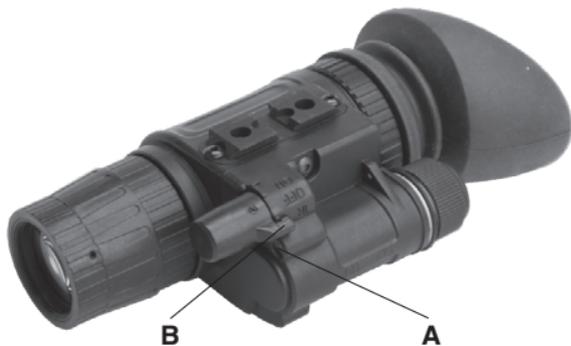


Figure 4.3
Infrared (IR) Illuminator Operations

SECTION V

OPERATIONAL DEFECTS

5.1 ZEROING OPERATIONAL DEFECTS

Operational defects relate to the reliability of the image intensifier and are an indication of instability. If identified, they are an immediate cause for rejecting the ATN NVM-14. They include shading, edge glow, flashing, flickering, and intermittent operation.

A. SHADING

If shading is persistent, you will not see a fully circular image (Figure 5.1). Shading is very dark and you cannot see an image through it. Shading always begins on the edge and migrates inward eventually across the entire image area. Shading is a high contrast area with a distinct line of demarcation. Contact ATN or point of purchase for warranty/repair procedures.

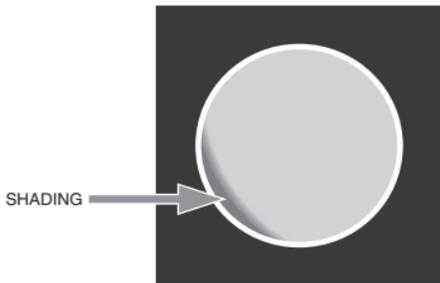


Figure 5.1
Shading

NOTE

Make sure the shading is not the result of improper exit pupil position.

B. EDGE GLOW

Edge glow is a bright area (sometimes sparkling) in the outer portion of the viewing area (Figure 5.2). To check for edge glow, block out all light by cupping a hand over the lens. If the image tube is displaying edge glow the bright area will still show up. Contact ATN or point of purchase for warranty/repair procedures.

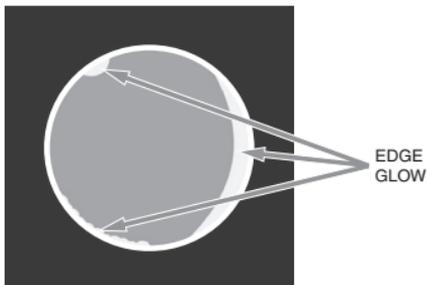


Figure 5.2
Edge Glow

C. FLASHING, FLICKERING, OR INTERMITTENT OPERATION

The image may appear to flicker or flash. If there is more than one flicker, check for loose battery adapter or weak battery. Contact ATN or point of purchase for warranty/repair procedures.

D. COSMETIC BLEMISHES

These are usually the result of manufacturing imperfections that do not affect image intensifier reliability and are not normally a cause for warranty or repair work. However, some types of blemishes can get worse over time and interfere with the usability of the device. If you believe a blemish is a cause for rejection, warranty or repair please ATN or point of purchase for warranty/repair procedures.

1. Bright Spots .

A bright spot is a small, non-uniform, bright area that may flicker or appear constant (Figure 5.3).

Not all bright spots make the ATN NVM-14 rejectable. Cup your hand over the lens to block out all light. If the bright spot remains, return the ATN NVM-14. Bright spots usually go away when the light is blocked out. Make sure any bright spot is not simply a bright area in the scene you are viewing. **Bright spots are acceptable if they do not interfere with the ability to view the outside scene.**

2. Emission Points .

A steady or fluctuating pinpoint of bright light in the image area that does not go away when all light is blocked from the objective lens of the monocular (Figure 5.3). The position of an emission point within the image area does not move. Not all emission points make the ATN NVM-14 rejectable. Make sure any emission point is not simply a point light source in the scene you are viewing. **Emission points are acceptable if they do not interfere with the usability of the device.**

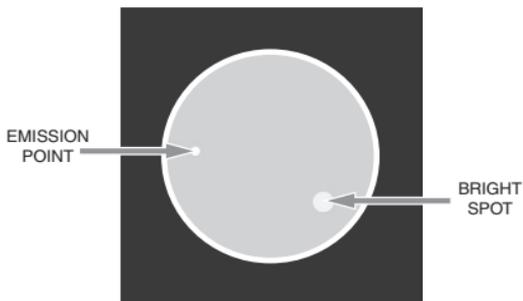


Figure 5.3
Bright Spots and Emission Points

3. Black Spots .

These are cosmetic blemishes in the image intensifier or dirt or debris between the lenses. Black spots are acceptable as long as they do not interfere with viewing the image. **No action is required if this condition is present unless the spots interfere with the usability of the device.**

4. Fixed-Pattern Noise .

This is usually a cosmetic blemish characterized by a faint hexagonal (honeycomb) pattern throughout the viewing area that most often occurs at high light levels or when viewing very bright lights (Figure 5.4). This pattern can be seen in every image intensifier if the light level is high enough. **This condition is acceptable as long as the pattern does not interfere with viewing the image and usability of the device.**




Figure 5.4
Fixed-Pattern Noise

5. Chicken Wire .

An irregular pattern of dark thin lines in the field of view either throughout the image area or in parts of the image area (Figure 5.5). Under the worst-case condition, these lines will form hexagonal or square-wave shaped lines. This is typically

viewed in high light conditions. **No action is required if this condition is present unless it interferes with the viewing the image and interferes with the users usability of the device.**




Figure 5.5
Chicken Wire

SECTION VI

MAINTENANCE

6.1 PREVENTIVE MAINTENANCE

A. PURPOSE OF PMCS

PMCS is performed daily when in use to be sure that the NVM-14 is ready at all times. Procedures listed in Table 6.1 are a systematic inspection of the NVM-14 that will enable you to discover defects that might cause the sight to fail on a mission.

B. FREQUENCY OF PERFORMING PMCS

The frequency of performing PMCS is as follows:

1. Daily when the NVM-14 is in use.
2. When it is removed from the case for any reason.

TABLE 6.1 PREVENTIVE MAINTENANCE CHECKS AND SERVICES FOR THE ATN NVM-14

ITEM NO.	LOCATION ITEM TO CHECK/SERVICE	PROCEDURE	NOT FUNCTIONING AT OPTIMAL LEVEL IF
1	Maintenance	Open carrying case, inventory items. Previously recorded faults on maintenance records.	Not Current. Fault not corrected.
MONOCULAR			
2	Optical Surfaces	Inspect lens for dirt, fingerprint residue, chips, or cracks. If necessary, clean and dry lens with water and lens tissue.	Scratches or chips hinder vision with monocular turned on, or if cracks are present.
3	External Surfaces	Inspect for cracks or damage. Scratches and gouges are OK if operation is not affected	Cracked or damaged.

ITEM NO.	LOCATION ITEM TO CHECK/SERVICE	PROCEDURE	NOT FUNCTIONING AT OPTIMAL LEVEL IF
4	Battery Adapter / Compartment	Check to make sure battery adapter is present. Remove battery adapter and inspect for corrosion, moisture, corroded or defective contacts, and that o-ring is present.	Adapter is missing, contacts damaged or corroded, or o-ring is missing.
5	Diopter Adjustment Ring	Rotate diopter adjustment ring to make sure the eyepiece is not too tight or too loose.	Binding, not moving freely or too loose.
6	Eyecup	Inspect for dirt, dust, and cracked or torn cup. Inspect for bent, broken or improperly fitting eyecup. If necessary, clean with water.	
7	Objective Lens Focus Ring	Rotate objective lens focus ring to ensure free movement.	Binding or not moving freely.
8	Lens Cap	Inspect for cracked, torn, or missing lens cap.	
9	Viewed Image	Refer to Section V – Operation Defects – to inspect for operational defects.	Flickering, flashing, edge glow, or shading is observed.
10	Strap	Inspect for cuts, tears, fraying, holes, cracks, or defective fasteners.	Damage causes straps to be unserviceable.

ITEM NO.	LOCATION ITEM TO CHECK/SERVICE	PROCEDURE	NOT FUNCTIONING AT OPTIMAL LEVEL IF
11	Socket	Inspect for dirt, dust, or corrosion. Insert the rail of ATN NVM-14 into socket to verify secure attachment of ATN NVM-14 to headmount. If necessary, clean socket with water.	Damaged, latch won't work or too loose.
12	Socket	Press the socket-release button and check for free motion. Inspect for damage.	Binding, damaged or non-operational slide mechanism.
13	Headmount / Helmet Mount Adapter	Inspect for dirt, dust, or corrosion. Insert adapter into headmount or helmet mount socket to verify secure attachment.	Damaged, will not latch securely.
14	Weapon Mount	Inspect for dust, dirt, or corrosion.	Damaged, will not mount to ATN NVM-14 or will not mount to weapon mount rail.
<p>CAUTION</p> <p>The demist coating on the demist shield can be damaged if cleaned while wet or cleaned with wet lens paper. Clean only when the demist shield is dry and only use dry lens paper.</p>			
15	Demist Shield	Inspect for dirt, dust, scratches or damage. If necessary, clean when shield is dry with dry lens tissue only.	Damage or scratches hinder vision with ATN NVM-14 on.

ITEM NO.	LOCATION ITEM TO CHECK/SERVICE	PROCEDURE	NOT FUNCTIONING AT OPTIMAL LEVEL IF
16	Sacrificial Window	Inspect for dirt, dust, scratches, or damage. If necessary, clean.	Damage or scratches hinder vision with ATN NVM-14 on.
17	3X/5X/8X Magnifier	Inspect optical surface for dirt, dust, scratches or cracks.	Damage or scratches hinder vision.
18	Carrying Case	Remove all items and shake out loose dirt or foreign material. Inspect for tears, cuts, excess wear or damage to mounting clips.	
19	Neck Cord	Inspect for cuts, tears, or excess wear or damaged clips.	

6.2 TROUBLESHOOTING

Table 6.2 lists common malfunctions that you may find with your equipment. Perform the tests, inspections, and corrective actions in the order they appear in the table.

This table cannot list all the malfunctions that may occur, all the tests and inspections needed to find the fault, or all the corrective actions needed to correct the fault. If the equipment malfunction is not listed or actions listed do not correct the fault, notify ATN or your point of Purchase.

TABLE 6.2 OPERATOR TROUBLESHOOTING FOR THE ATN NVM-14

	MALFUNCTION	TEST OR INSPECTION	CORRECTIVE ACTION
1	Monocular fails to activate.	Press operation button. Check for defective, missing or improperly installed batteries.	Press button one short push. Replace batteries or install correctly.
2	IR illuminator fails to activate.	In a dark location with system turned on, activate IR. Visually check IR illuminator operation; scene should brighten.	If IR illuminator fails to activate, refer to higher level of maintenance.
3	IR indicator fails to activate.	Visual.	Refer to higher level of maintenance.
4	Poor image quality	Check objective lens or eyepiece focus. Check for fogging or dirt on lens.	Refocus. Clean lens surface. If image quality is still poor, refer to higher level of maintenance.

	MALFUNCTION	TEST OR INSPECTION	CORRECTIVE ACTION
5	Light visible around eyecup	Check eye-relief distance. Check eyecup for resiliency.	Re-adjust for proper eye-relief distance. If eyecup is defective, refer to higher level of maintenance.
6	Diopter adjustment cannot be made	Check to see if the diopter adjustment ring is bent or broken	If damaged, refer to higher level of maintenance.
7	Battery adapter difficult to remove.	Check for damaged battery adapter.	If damaged, refer to higher level of maintenance.
8	Head straps cannot be tightened	Check for defective buckles, fasteners or straps.	If damaged, refer to higher level of maintenance.
9	Headmount or helmet mount socket does not catch.	Check socket for dirt. Check socket for damage.	Clean socket. If damaged, return headmount or helmet mount to higher level of maintenance.
10	Helmet mount will not tighten to helmet.	Inspect mounting hardware for damage.	If damaged, refer to higher level of maintenance.

6.3 CLEANING THE ATN NVM-14

CAUTION

The ATN NVM-14 is a precision optical instrument and must be handled carefully at all times to prevent damage.

Do not scratch the external lens surfaces or touch them with your fingers.

Wiping demisting shield with lens paper while wet or with wet lens paper can damage the coating.

Clean monocular with water, if necessary, and dry thoroughly. Clean lenses with lens paper (and water, if necessary, except for demisting shield).

6.4 TUBE MAINTENANCE / REPLACEMENT

1. Unscrew the eyepiece (E) from the case of device (A).
2. Unscrew the lock ring (D) from the case of device.
3. Extract the light guide (C) from the case of device.
4. Extract the tube (B) to be replaced from the case of device (A).
5. Introduce the new tube (B) into the case of device (A).
6. Set the light guide (C) onto the place in the case.
7. Screw the lock ring (D) into the case of device.
8. Screw the eyepiece (E) into the case of device (A).

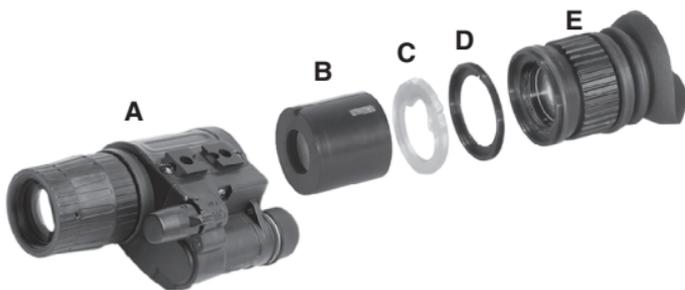


Figure 6.1
Maintenance/Replacement of the tube in the NVM-14

APPENDIX A

END ITEM COMPONENTS

TABLE A.1 ATN NVM-14 END ITEM COMPONENTS

ITEM	DESCRIPTION
1	ATN NVM-14 Monocular Assembly
2	Swing Arm Interface, Head/Helmet
3	Weapon Mount
4	Operator Manual
5	Demist Shield, Eyepiece
6	Soft Carrying Case
7	Sacrificial Window
8	Should Strap
9	Head Mount Assembly
10	Brow Pad (Small)
11	Brow Pad (Large)
12	Lens Cap
13	Eye Cup Assembly
14	CR123A 3.0V DC Battery, Lithium

APPENDIX B

REPAIR PARTS LIST

TABLE B.1 ATN NVM-14 REPAIR PARTS LIST

ITEM	DESCRIPTION	PART NO.
1	Battery Cap	NVM-138
2	Lithium Battery	CR123A
3	Purge Screw	7B315
4	Lens Cap	NVM-178
5	Sacrificial Window	NVM-032
6	Demist Shield	NVM-033
7	Battery Cap Retainer	NVM-156
8	Objective Lens Assembly	NVM-030
9	Eyepiece Lens Assembly	NVM-035
10	Head/Helmet Mount Adapter	NVM-042
11	Ship/Storage Case	7B257-2
12	Neck Cord	7B306
13	Soft Carry Case	7B262
14	Eyecup Assembly	7B422
15	Operator Manual	NVM-015
16	Shoulder Strap	7B267
17	Goggle Kit	7B268-A1
18	Dual Bridge	NVM-200
19	IR850	NVM-202
20	Picatinny Adapter	NVM-203
21	Camera Adapter	NVM-204
22	3X Lens	NVM-205
23	5X Lens	NVM-206
24	8X Lens	NVM-209
25	Lens Adapter	NVM-207
26	Universal Helmet mount	NVM-208



For customer service and technical support, please contact

American Technologies Network Corp.

1341 San Mateo Avenue, South San Francisco, CA 94080

phone: 800-910-2862, 650-989-5100; fax: 650-875-0129

www.atncorp.com